


DIN 915
Gewindestifte mit Zapfen,
mit Innensechskant

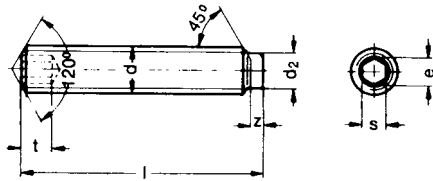

d	s	e	t min	d2	z min
M 3	1,5	1,73	2,0	2,0	1,5
M 4	2	2,3	2,5	2,5	2,0
M 5	2,5	2,87	3,0	3,5	2,5
M 6	3	3,44	3,5	4,0	3,0
M 8	4	4,58	5,0	5,5	4,0
M 10	5	5,72	6,0	7,0	5,0
M 12	6	6,86	8,0	8,5	6,0
M 16	8	9,15	10,0	12,0	8,0

alle Angaben ohne Gewähr – noch Fragen? techdat@wegertseder.com