


DIN 912
Zylinderschrauben
mit Innensechskant

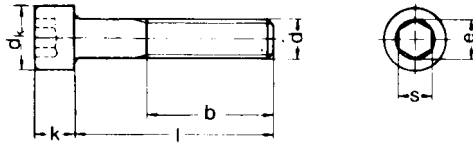

d	s	e min	b max	k max	dk max
M 3	2,5	2,87	18	3	5,68
M 4	3	3,44	20	4	7,22
M 5	4	4,58	22	5	8,72
M 6	5	5,72	24	6	10,22
M 8	6	6,86	28	8	13,27
M 10	8	9,15	32	10	16,27
M 12	10	11,43	36	12	18,27
M 14	12	13,72	40	14	21,33
M 16	14	16,00	44	16	24,33
M 18	14	16,00	48	18	27,33
M 20	17	19,44	52	20	30,33
M 24	19	21,73	60	24	36,39

alle Angaben ohne Gewähr – noch Fragen? techdat@wegertseder.com